

Thermometer for heating engineers TT 60

TT 60



Bimetallic thermometer TT 60 is intended for temperature measurement in hot water or steam distribution systems. The minimum temperature is 0 °C. The thermometer must be installed in thermometer well.


Description

Thermometer consists of plastic head and brass stem. Brass thermometer well (see drawing for dimensions) and locking spring are part of delivery. Well complies with pressure 0,6 MPa.

Technical data

| Scale range | Measuring range | Scale division |
|-------------|--|----------------|
| 0 to 120 °C | 0 to 120 °C | 2 °C |
| Ø head D | Permissible deviation | Stem length L |
| 60 mm | accuracy class 2 according to DIN16203 | 45 mm |

Technical drawings

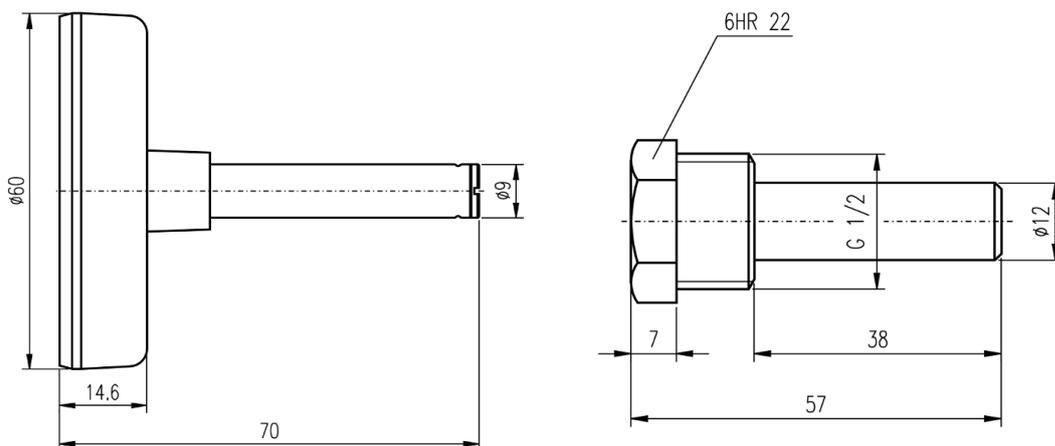

Contacts

APATOR METRA s. r. o.

Havlíčková 919/24
787 01 Šumperk
Czech Republic

Tel.: +420 583 718 261
Fax.: +420 583 718 150
E-mail: prodej@metra-su.cz
WWW: www.metra-su.cz

Your distributor:

The manufacturer reserves the right to change design, technical specifications and accessories without prior notice.